


B772 TRANSISTOR (PNP)

FEATURES

- Power Dissipation:1.25W
- Low Collector-emitter Saturation Voltage



TO-252-2L

1. BASE
2. COLLECTOR
3. EMITTER

MAXIMUM RATINGS(T_a=25 °C unless otherwise not)

Symbol	Parameter	Value	Unit
V _{CBO}	Collector-Base Voltage	-40	V
V _{CEO}	Collector-Emitter Voltage	-30	V
V _{EBO}	Emitter-Base Voltage	-6	V
I _C	Collector Current -Continuous	-3	A
P _C	Collector Dissipation	1.25	W
R _{θJA}	Thermal Resistance from Junction to Ambient	100	°C/W
T _J , T _{stg}	Operation Junction and Storage Temperature Range	-55~+150	°C

ELECTRICAL CHARACTERISTICS (T_a=25°C unless otherwise specified)


Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	V _{(BR)CBO}	I _C =-100μA, I _E =0	-40			V
Collector-emitter breakdown voltage	V _{(BR)CEO}	I _C =-10mA, I _B =0	-30			V
Emitter-base breakdown voltage	V _{(BR)EBO}	I _E =-100 μA, I _C =0	-6			V
Collector cut-off current	I _{CBO}	V _{CB} =-40 V, I _E =0			-1	μA
Collector cut-off current	I _{CEO}	V _{CE} =-30 V I _B =0			-10	μA
Emitter cut-off current	I _{EBO}	V _{EB} =-6V, I _C =0			-1	μA
DC current gain	h _{FE (1)}	V _{CE} =-2V, I _C =-1A	60		400	
	h _{FE (2)}	V _{CE} =-2V, I _C =-100mA	32			
Collector-emitter saturation voltage	V _{CE(sat)}	I _C =-2A, I _B =-0.2A			-0.5	V
Base-emitter saturation voltage	V _{BE(sat)}	I _C =-2A, I _B =-0.2A			-1.5	V
Transition frequency	f _T	V _{CE} =-5V, I _C =-0.1A f=10MHz	50			MHz

CLASSIFICATION of h_{FE(1)}

Rank	R	O	Y	GR
Range	60-120	100-200	160-320	200-400




Typical Characteristics

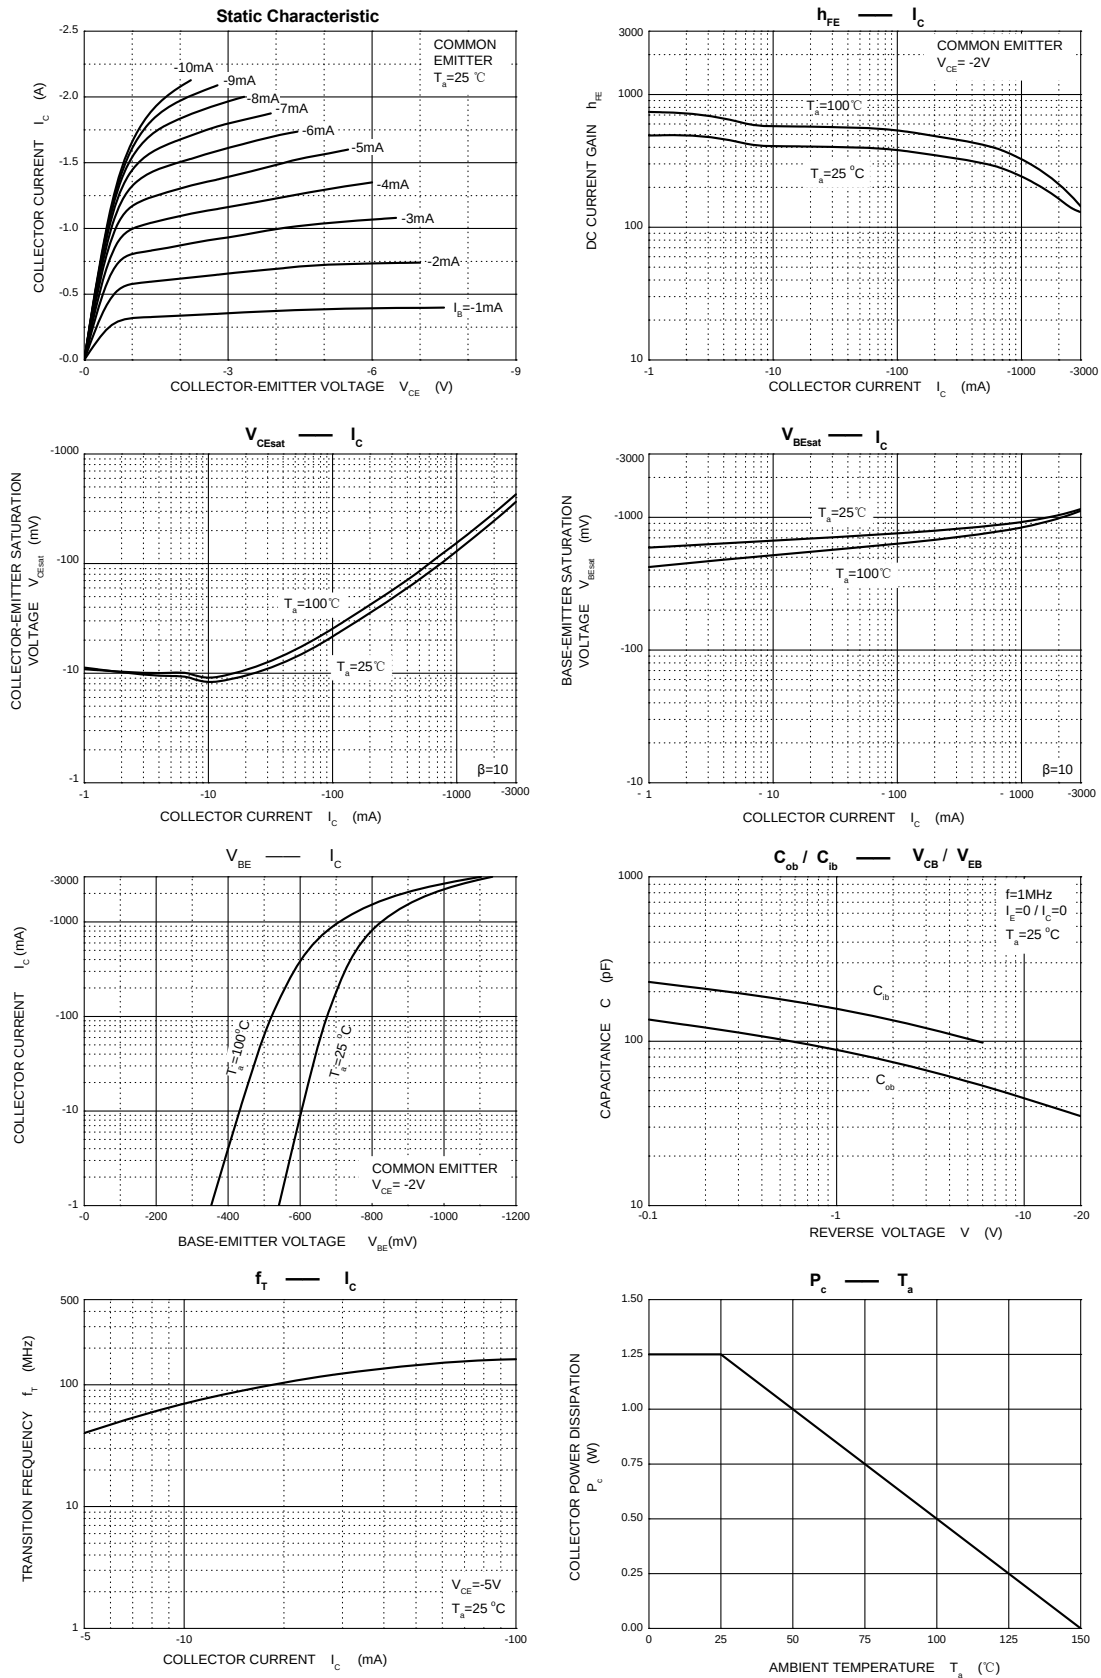


Package Outline Dimensions & Suggested Solder Pad Layout

Package Outline Dimensions

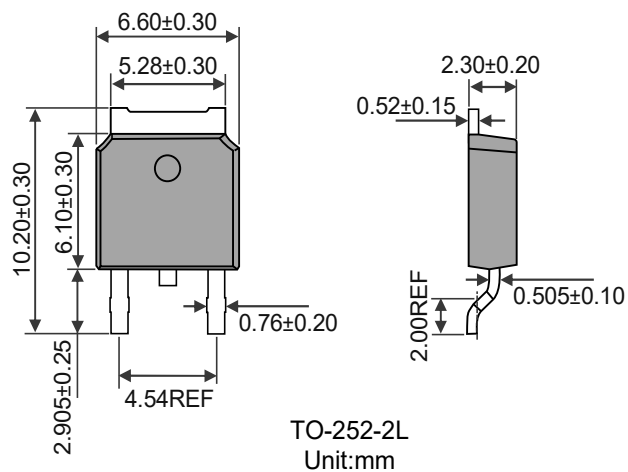


Suggested Solder Pad Layout

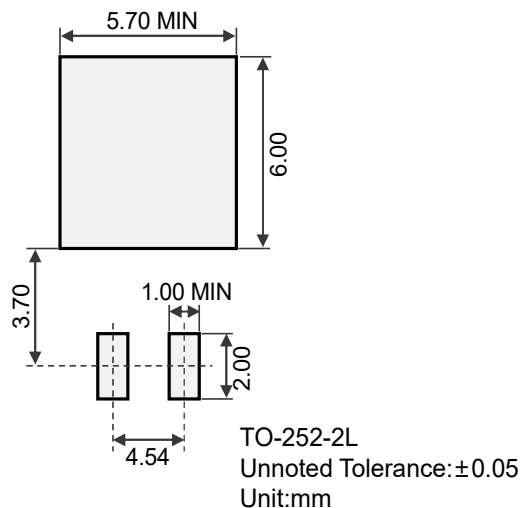


Packing Information

Packaging	Part Number	Quantity(pcs)	Size(mm)
Tube	Tube	80	L540×W20×H5
	Inner Box	4000	L570×W115×H55
	Outer Box	20000	L595×W320×H135
Reel	Reel	3000	Φ330×THK17
	Inner Box	3000	L350×W340×H25
	Outer Box	30000	L355×W300×H360

Packaging:Tube

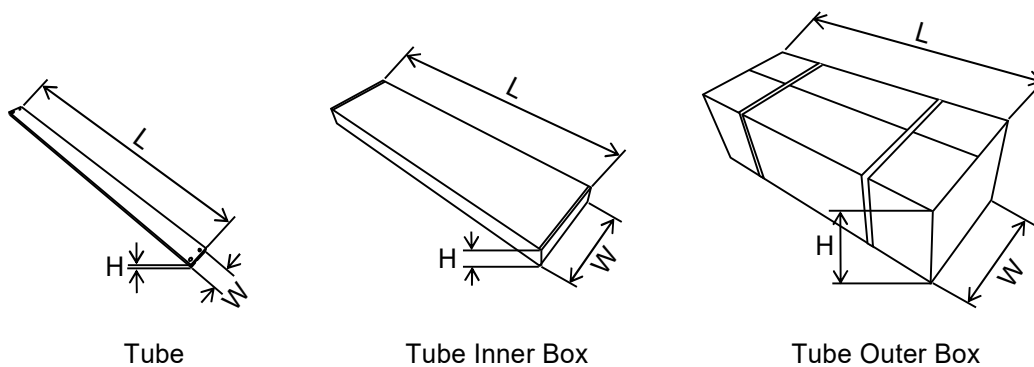

Packaging:Reel

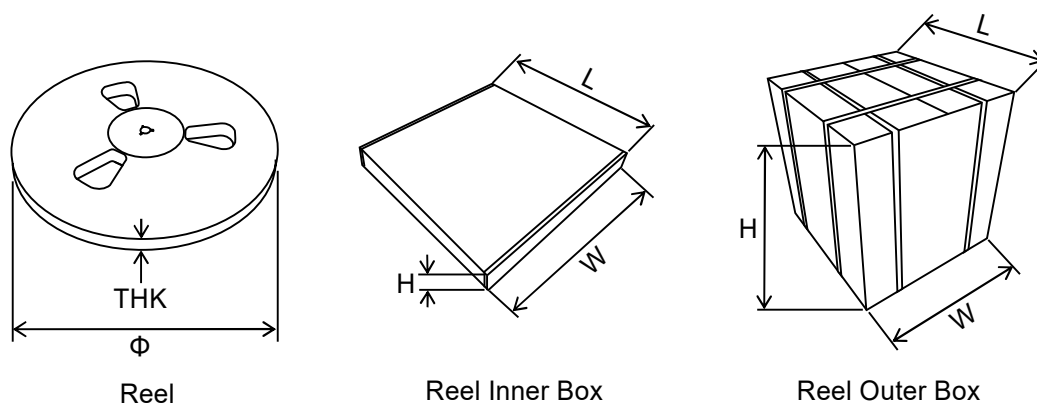

DISCLAIMER

- 1.Above specification may be changed without notice. MHCHXM will reserve authority on material change for above specification.
- 2.The graphs shown in this datasheet are representing typical data only and do not show guaranteed values.
- 3.When using this product, please observe the absolute maximum ratings and the instructions for use outlined in these specification sheets. MHCHXM assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
- 4.These specification sheets include materials protected under copyright of MHCHXM. Reproduction in any form is prohibited without the specific consent of MHCHXM.
- 5.This product is not intended to be used for military, aircraft, automotive, medical, life sustaining or life saving applications or any other application which can result in human injury or death. Please contact authorized MHCHXM sales agent for special application request.
- 6.Statements regarding the suitability of products for certain types of applications are based on MHCHXM's knowledge of typical requirements that are often placed on MHCHXM products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify MHCHXM's terms and conditions of purchase, including but not limited to the warranty expressed therein.
- 7.This publication supersedes & replaces all information previously supplied. For additional application information, please visit our website <http://www.jshxm.com> , or consult your nearest MHCHXM's sales office for further assistance.

